



LED RECESSED DOWNLIGHT A-SERIES, 6" & 8"

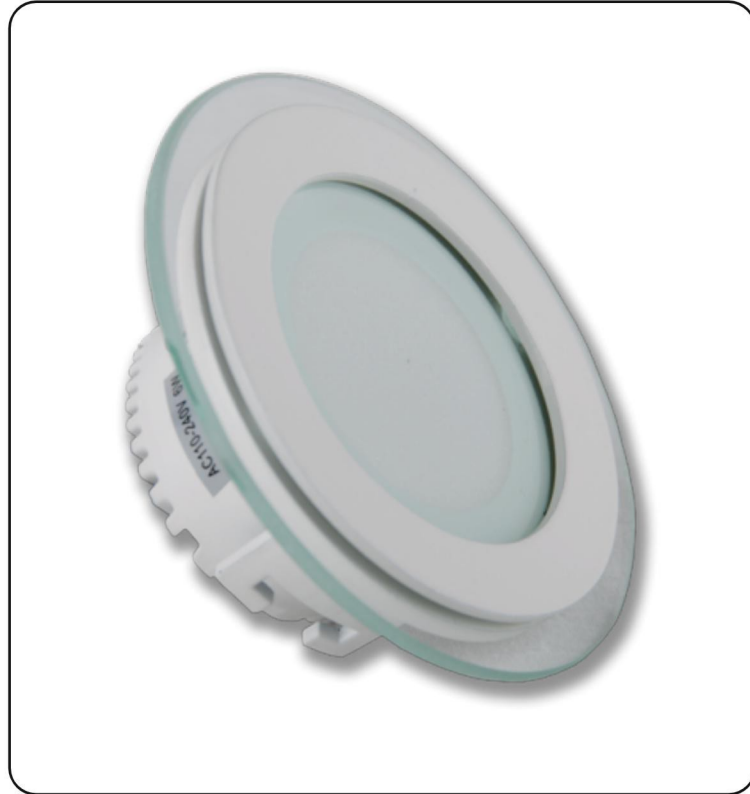

Model	Size, Shape	Power	Power Factor	Voltage	LED Type	Luminous Flux	CRI	Beam Angle	Color Temp	Dimensions	Cut Hole Size	Lifespan	Packaging
Model Code		W	PF	Volts	Type, pcs	lm		deg	K	mm	mm	hours	pcs/box, size
6 INCH													
LD12WA-3-SQ	6" Square	12W	> 0.95	220-240V AC, 50/60Hz	SMD5730 24pcs	1100	> 75	160°	3000K	160x160x45mm	125x125mm	30,000	30pcs/box, 49x36x20.5cm
LD12WA-6-SQ	6" Square	12W	> 0.95	220-240V AC, 50/60Hz	SMD5730 24pcs	1100	> 75	160°	6000K	160x160x45mm	125x125mm	30,000	30pcs/box, 49x36x20.5cm
LD12WA-3-R	6" Round	12W	> 0.95	220-240V AC, 50/60Hz	SMD5730 24pcs	1100	> 75	160°	3000K	Ø160x45mm	Ø125mm	30,000	30pcs/box, 49x36x20.5cm
LD12WA-6-R	6" Round	12W	> 0.95	220-240V AC, 50/60Hz	SMD5730 24pcs	1100	> 75	160°	6000K	Ø160x45mm	Ø125mm	30,000	30pcs/box, 49x36x20.5cm
8 INCH													
LD18WA-3-SQ	8" Square	18W	> 0.95	220-240V AC, 50/60Hz	SMD5730 36pcs	1620	> 75	160°	3000K	202x202x45mm	165x165mm	30,000	30pcs/box, 49x36x20.5cm
LD18WA-6-SQ	8" Square	18W	> 0.95	220-240V AC, 50/60Hz	SMD5730 36pcs	1620	> 75	160°	6000K	202x202x45mm	165x165mm	30,000	30pcs/box, 49x36x20.5cm
LD18WA-3-R	8" Round	18W	> 0.95	220-240V AC, 50/60Hz	SMD5730 36pcs	1620	> 75	160°	3000K	Ø202x45mm	Ø165mm	30,000	30pcs/box, 49x36x20.5cm
LD18WA-6-R	8" Round	18W	> 0.95	220-240V AC, 50/60Hz	SMD5730 36pcs	1620	> 75	160°	6000K	Ø202x45mm	Ø165mm	30,000	30pcs/box, 49x36x20.5cm

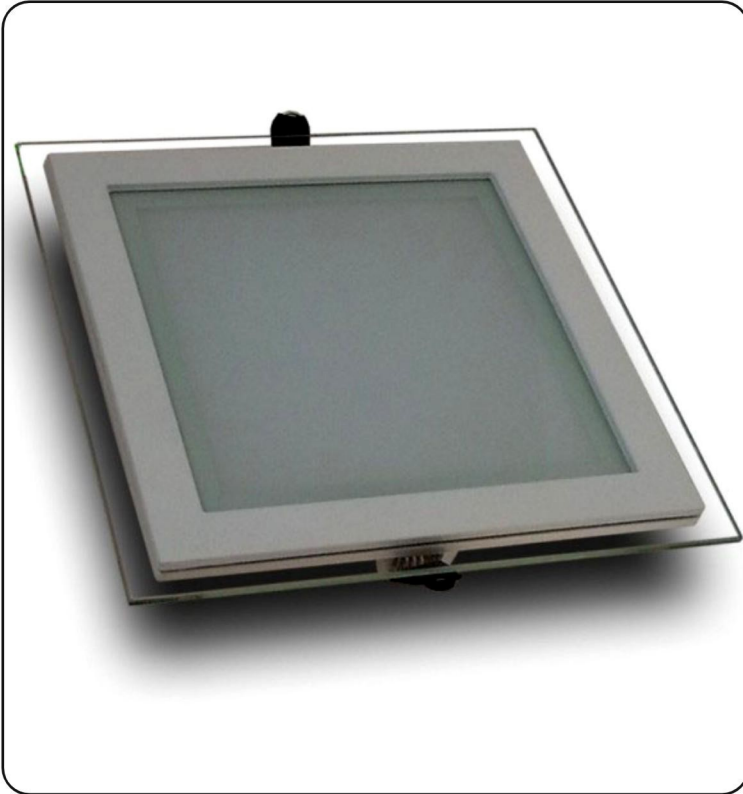

Distributed by:
Zenith Century International Sdn. Bhd. (793394-V)

