



SOLAGEO BASICS LED FLOODLIGHT (10W 30W 50W)



10W

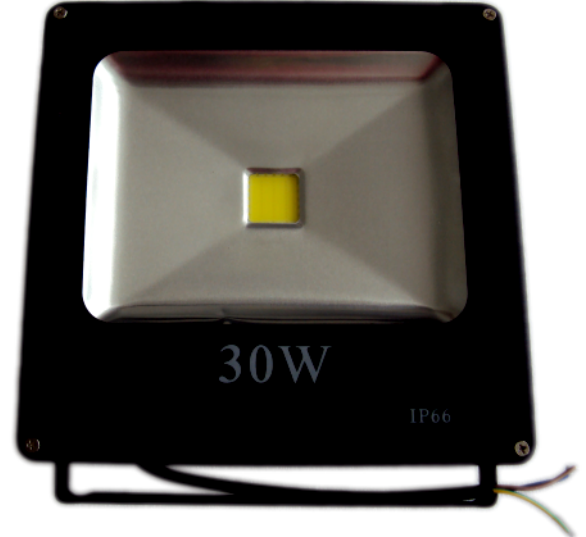

30W

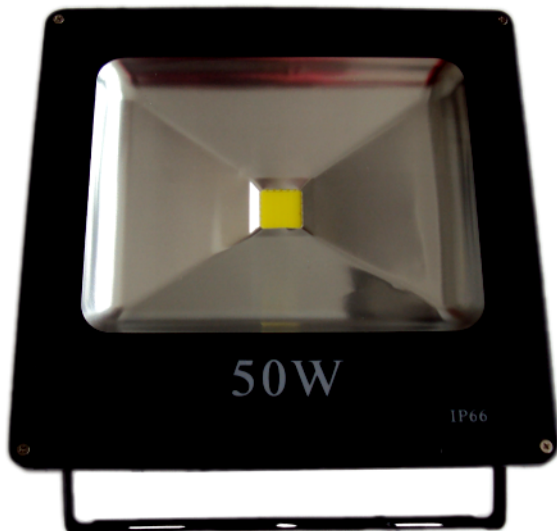

50W



Model	Power	Color Temperature	Beam Angle	IP Rating	Dimensions	Fitting Color	Materials	Projection Distance	Lifespan
Model Code	W	K	degrees	IP	Width x Height x Depth (mm)			Meter	Hours
FL10W-3S-3B	10W	3000K	120°	IP66	120x128x40mm	Black	Aluminium Alloy, Tempered Glass	1.5-2m	30,000 hours
FL10W-3S-6B	10W	6000K	120°	IP66	120x128x40mm	Black	Aluminium Alloy, Tempered Glass	1.5-2m	30,000 hours
FL30W-3S-3B	30W	3000K	120°	IP66	228x224x50mm	Black	Aluminium Alloy, Tempered Glass	5-8m	30,000 hours
FL30W-3S-6B	30W	6000K	120°	IP66	228x224x50mm	Black	Aluminium Alloy, Tempered Glass	5-8m	30,000 hours
FL50W-3S-3B	50W	3000K	120°	IP66	285x275x70mm	Black	Aluminium Alloy, Tempered Glass	7-10m	30,000 hours
FL50W-3S-6B	50W	6000K	120°	IP66	285x275x70mm	Black	Aluminium Alloy, Tempered Glass	7-10m	30,000 hours

The information presented here is accurate at time of publishing. During upgrading and product improvement, material, design and specifications may change without prior notice.



Distributed by:
Zenith Century International Sdn. Bhd. (793394-V)

solageo
Basics